


## Metrologic FocusBT (Model MS1633) and SerialMagic Professional

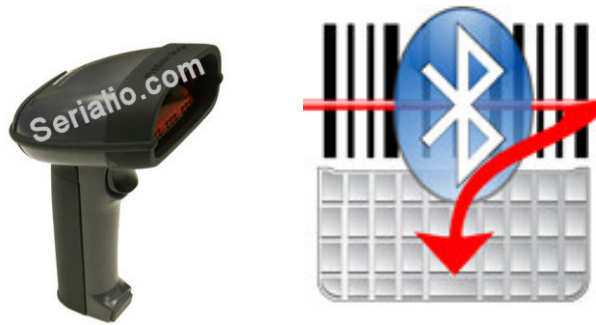

### To use the MS1633 scanner with SerialMagic, follow these steps:

- Scan the four barcodes you see below to configure the MS1633 for SerialMagic (MS1633 should be able to scan directly from computer screen, if not then print.)
- Launch SerialMagic Professional
- On Windows, click “Add” and follow the Wizard, then START to connect.
- On Mobile devices, click “START” to launch the connection process.
- On OSX, click “Add” to pair the scanner with the OSX machine, then START.
- Passkey is 1234

Provide Service












Enable STX Prefix

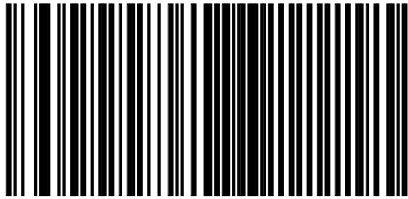

Enable CR Suffix



Enable Range Gate (Memory Mode - optional)

Essential Control Barcodes	
<p>Provide Service</p>  <p>0 0 0 C A 7 0 0 0 0 0 0</p>	Provide Bluetooth Service (Configure to accept SPP Connection)
 <p>3 1 1 6 6 1 3</p>	Enable CR Suffix
 <p>3 1 1 6 6 0 3</p>	Disable CR Suffix
 <p>3 1 1 6 6 1 5</p>	Enable STX
 <p>3 1 1 6 6 0 5</p>	Disable STX
 <p>3 9 9 9 9 9 8</p>	Recall Defaults
 <p>3 1 2 3 7 0 7</p>	Enable <b>Range Gate</b> – Store scanned barcodes into memory.
Barcodes REQUIRED by SerialMagic Pro to identify Bookland (ISBN) Codes	
 <p>3 1 0 7 9 1 5</p>	Enable AIM ID Characters
 <p>3 1 0 7 9 0 5</p>	Disable AIM ID Characters